Nuclear Power Plant Project Charter

Sponsor Initials:

1. General Project Information	
Project Name:	**Team 4:**
Executive Sponsor(s):	**Dr. Tami Katz**
Purpose of project:	Nuclear Power Plant in Colorado

2. Project Team

	Type	Number	Duration (% of Project)	Internal/External
Project Managers:		7	100%	Internal
Engineering		80	100%	Internal
Regulatory		20	100%	Internal
Operations		40	40%	Internal
Construction		500	40%	External

3. Stakeholder Individuals and Categories

[Identify all known contributors, users, customers and others who may be involved in or interested in this project.]

Colorado Government (Colorado Energy Office, Colorado Department of Public Health and Environment, Nuclear Regulatory Commision)

Fuel Supply and Disposal

Utility Companies (Xcel Energy – Will purchase power outputted from plant)

Contractors - Construction

Neighboring Communities

Tribal Nations

Investment Institutions

Local/National Media

4. Project Scope Statement

Project Purpose / Business Justification

[Explain the reason(s) for doing this project.]

Colorado just classified nuclear power as a clean energy source, so for our project we are planning the creation of the only operational nuclear power plant in the state. This would provide low-carbon emission, high reliability for continuous power, create a small physical footprint, and many economic opportunities.

Objectives (in business terms)

[Explain what the project is trying to achieve by stating its objectives which should be measurable and defined in terms of the project's major deliverables, effort, cost, tolerances and business benefits expected.]

The objectives of the project are providing a low cost, safe, and reliable baseload electricity source. Key goals would include maximizing capacity factors, minimizing building/ operating cost, adhering to strict regulatory safety standards, and supporting a carbon neutral/decarbonization energy method.

Nuclear Power Plant Project Charter

Sponsor Initials:

Deliverables

[Deliverables define what the project must accomplish, products & services to be provided.]

At the conclusion of the project, the project team will deliver an operational, licensed, and integrated nuclear power plant site capable of 2,000 MWe output during peak production. The project team will be responsible for ensuring the site complies with all local, state, federal, and international regulations surrounding the production and disposal of nuclear material. The project team will work with relevant utility companies to ensure a safe and reliable connection between the site and the regional power grid. The project team will work with all relevant stakeholders to approve an emergency action plan. The project team will create a project budget and timeline.

Constraints & Exclusions

[Constraints are boundary conditions that the project must stay within. Exclusions are defined aspects to be explicitly excluded from the Scope.]

Constraints: Regulatory requirements, budget limitations, environmental regulations, water availability, workforce availability

Exclusions: Power grid expansion, nuclear fuel mining and enrichment, policy development

Requirements/Quality Basis

[Specific, measurable performance or timing or cost needs of the customer with respect to the Deliverables.]

1. Power generation – 2,000 MWe
2. Construction Schedule
3. Budget Target
4. Grid Integration – 30 kV which will be stepped up for transmission by utility
5. Catastrophic failure rate of 1e-10 per operating hour or better

5. Project Duration & Major Milestones

Milestone	Estimated Completion Date
Start	
[Significant incremental events of partial completion that can be estimated at the time of initiation.]	
Site Feasibility Study	1/1/2028
Definitive Feasibility Study (DFS)	1/1/2030
Systems Requirement Review (SRR)	6/30/2028
Preliminary Regulatory Review (PRR)	6/30/2029
Preliminary Design Review (PDR)	1/1/2030
Critical Design Review (CDR)	6/30/2031
Critical Regulatory Review (PRR)	6/30/2031
Emergency Action Plan	1/1/2030
Construction Start	1/1/2032
Construction End	1/1/2038
Acceptance Tests	1/1/2039
Full Operation and Integration	1/1/2040

Nuclear Power Plant Project Charter

Sponsor Initials:

6. Estimated Budget

Resource Needed	Estimated Cost
[Estimated funding and any other resources required by the project, excluding project Team labor, listed above.]	
Equipment (nuclear steam supply system, electrical and generating equipment, mechanical equipment, insumentation and control system)	14.4 billion
Construction Materials	3.6 billion
Labor Onsite	7.5 billion
Other Services	600 million
First Fuel Load	900 million
TOTAL	27 billion

7. Major Known Risks

Risk	Risk Rating (Hi, Med, Lo)
[Risks are statements of issues or problems that have the potential to arise but have not yet occurred. List and describe the initial risks for this project.]	
Regulatory Roadblocks	High
Inability to secure fuel futures	Med
Criticial System Failure	Low

8. Communication Strategy

[General description of how the project manager will communicate with the Sponsor, Project Team and Stakeholders, e.g., frequency of status reports, frequency of meetings, etc.]

The project manager will maintain and ensure communcation with sponsers, project teams and stakeholders, this will ensure alignment, transparency, and timley dissission making. The project sponser will recieve montly reports sumarizing the process, budget, risk, and major milestones, along with scheduling review meetings at key project phases. The project teams will meet for weekly breifing meetings along with daily team meeting when construction starts to disscus daily tasks, safety concerns, and schdule updates. External stakeholders, including regulators, local authorities, and community represntatives, will be engaged through quartly updstes, public brefinfings, and regulatory reports, with aditional communication provided as needed for major milestones or emerging issues. This structured apporocach ensure consistent information flow, accountability issues mangement throughout the lifecycle of the project.

9. Incorporated Assumptions & Notes

[Assumptions are statements taken for granted or accepted as true without proof.. List and describe any assumptions made in the decision to charter this project.]

1. Clean energy is needed
2. Regulatory approval is achievable
3. Funding is secured
4. Skilled workforce will be available
5. There will be continued public and political support

10. Sign-off


Date: ___2/16/26_____. By initialing each page and signing below, I Tami Katz, the Project Sponsor, approve the project described herein and authorize it to begin.

By: _____ Signature of Project Sponsor

Stakeholder Analysis

Stakeholder Group or Individual	Which types of info?	How Often?	Means of Communication?	Who does it? PM? Other?
Government Offices/Departments	Licensing documentation, safety compliance reports, environmental impact data, inspection results, incident reports, emergency preparedness updates, waste disposal plans	Weekly	Face-to-Face, Online Meetings, Email	Director of Regulatory Affairs
Xcel Energy	Updates to estimated completion date. Technical interface details	Monthly	Face-to-Face	Project Manager, technical leads as needed
Construction Contractor	Design plans. Construction Updates	Daily	Face-to-Face	Project manager, design engineers as needed
Neighboring Communities	Risk assessments, emergency procedures, economic impact studies	Monthly	Monthly forums	Community Relations Manager
Tribal Nations	Risk assessments, emergency procedures, economic impact studies	Monthly	Monthly forums	Community Relations Manager
Investment Institutions	Cashflow projection, current vs expected budget	Weekly	Online Meetings	Project Manager, Finance/accounting
Local/National Media	Project milestones	Monthly	Press Briefings, News Releases	Press Secretary


Fuel Supply and Disposal	Waste disposal plans, when fuel is needed	Monthly	Online meetings, emails, face to face as needed	Project manager, technical leads as needed

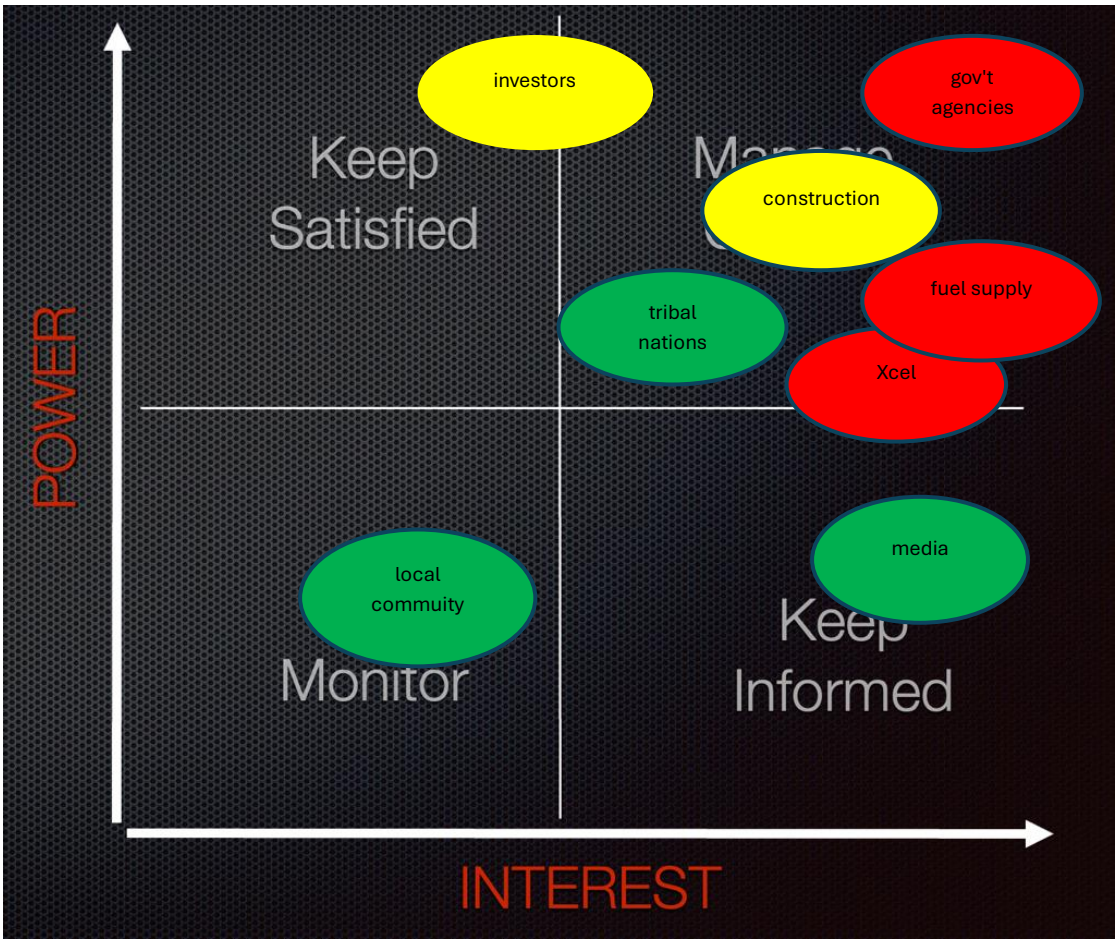

red = more expertise

yellow = some expertise

green = minimal expertise

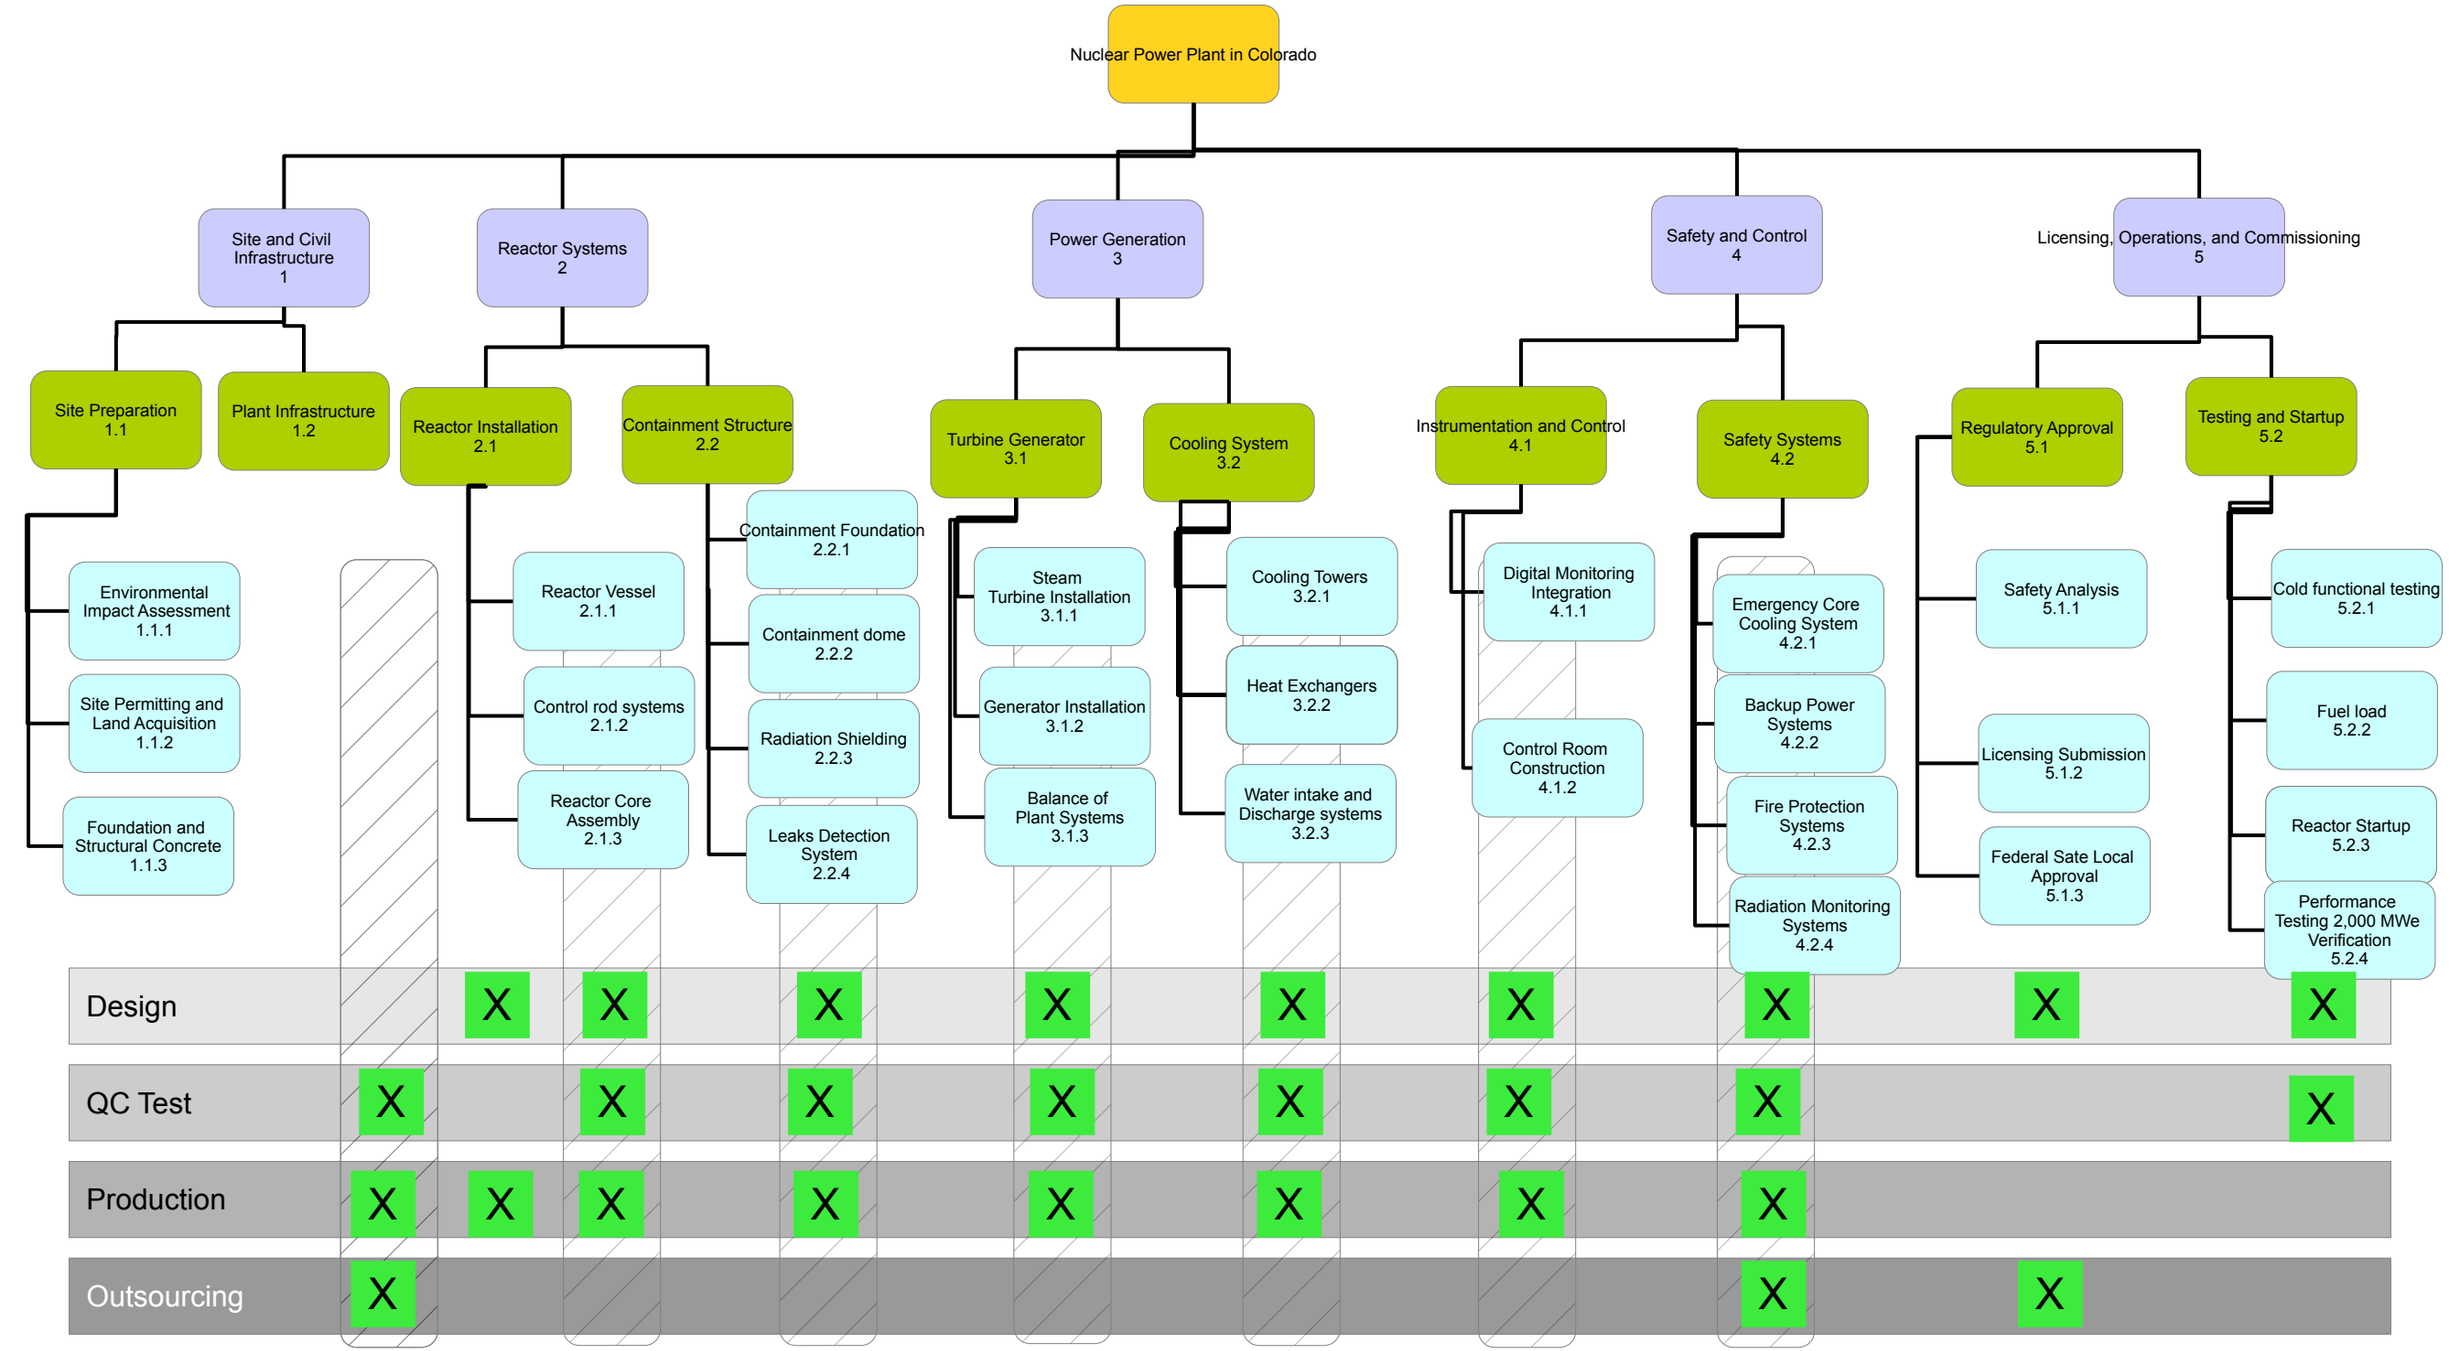
Nuclear Power Plant in Colorado
Site and Civil Infrastructure 1
Reactor Systems 2
Power Generation 3
Safety and Control 4
Licensing, Operations, and Commissioning 5
Site Preparation 1.1
Plant Infrastructure 1.2
Reactor Installation 2.1
Containment Structure 2.2
Turbine Generator 3.1
Cooling System 3.2
Instrumentation and Control 4.1
Safety Systems 4.2
Regulatory Approval 5.1
Testing and Startup 5.2
Environmental Impact Assessment 1.1.1
Site Permitting and Land Acquisition 1.1.2
Foundation and Structural Concrete 1.1.3
Reactor Vessel 2.1.1
Control rod systems 2.1.2
Reactor Core Assembly 2.1.3
Containment Foundation 2.2.1
Containment dome 2.2.2
Radiation Shielding 2.2.3
Leaks Detection System 2.2.4
Steam Turbine Installation 3.1.1
Generator Installation 3.1.2
Balance of Plant Systems 3.1.3
Cooling Towers 3.2.1
Heat Exchangers 3.2.2
Water intake and Discharge systems 3.2.3
Digital Monitoring Integration 4.1.1
Control Room Construction 4.1.2
Emergency Core Cooling System 4.2.1
Backup Power Systems 4.2.2
Fire Protection Systems 4.2.3
Radiation Monitoring Systems 4.2.4
Safety Analysis 5.1.1
Licensing Submission 5.1.2
Federal Sate Local Approval 5.1.3
Cold functional testing 5.2.1
Fuel load 5.2.2
Reactor Startup 5.2.3
Performance Testing 2,000 MWe Verification 5.2.4
Design
QC Test
Production
Outsourcing
X

Colorado Nuclear Power Plant

Mar 23, 2026


http://

Project manager	
Project dates	Jan 3, 2028 - May 30, 2031
Completion	0%
Tasks	34
Resources	0

Tasks


Name	Begin date	End date	ID
1.1.1 Environmental Impact Assessment	1/3/28	2/11/28	0
Systems Requirement Review	2/14/28	5/5/28	30
Preliminary Regulatory Review	5/8/28	7/7/28	31
Preliminary Design Review	7/10/28	12/22/28	32
Critical Design Review	12/25/28	6/8/29	33
Critical Regulatory Review	6/11/29	8/31/29	34
1.1.2 Site Permitting and Land Acquisition	9/3/29	11/23/29	1
1.1.3 Foundation and Structural Concrete	11/26/29	1/4/30	2
2.1.1 Reactor Vessel Installation	1/7/30	2/15/30	3
2.1.2 Control Rod Systems Installation	2/18/30	3/8/30	4
2.1.3 Reactor Core Assembly	3/11/30	4/5/30	5
2.2.1 Containment Foundation	1/7/30	2/15/30	6
2.2.2 Containment Dome Construction	2/18/30	3/29/30	7
2.2.3 Radiation Shielding Installation	4/1/30	5/10/30	8
2.2.4 Leak Detection System Installation	4/1/30	4/19/30	9
3.1.1 Steam Turbine Installation	5/13/30	6/7/30	10
3.1.2 Generator Installation	6/10/30	6/28/30	11
3.1.3 Balance of Plant Systems	7/1/30	8/9/30	12
3.2.1 Cooling Towers Construction	1/7/30	3/29/30	13
3.2.2 Heat Exchangers Installation	4/1/30	4/19/30	14
3.2.3 Water Intake/Discharge Systems	4/1/30	4/26/30	15
4.1.1 Digital Monitoring Integration	8/12/30	9/13/30	16
4.1.2 Control Room Construction	4/22/30	5/31/30	17
4.2.1 Emergency Core Cooling System	4/8/30	5/17/30	18
4.2.2 Backup Power Systems	6/3/30	6/28/30	19
4.2.3 Fire Protection Systems	6/3/30	6/28/30	20
4.2.4 Radiation Monitoring Systems	6/3/30	6/28/30	21
5.1.1 Safety Analysis	7/1/30	8/9/30	22
5.1.2 Licensing Submission	8/12/30	10/11/30	23
5.1.3 Federal/State/Local Approval	10/14/30	11/22/30	24
5.2.1 Cold Functional Testing	11/25/30	2/14/31	25
5.2.2 Fuel Load	2/17/31	2/25/31	26
5.2.3 Reactor Startup	2/26/31	3/6/31	27
5.2.4 Performance Testing (2000 MWe)	3/7/31	5/29/31	28

Gantt Chart

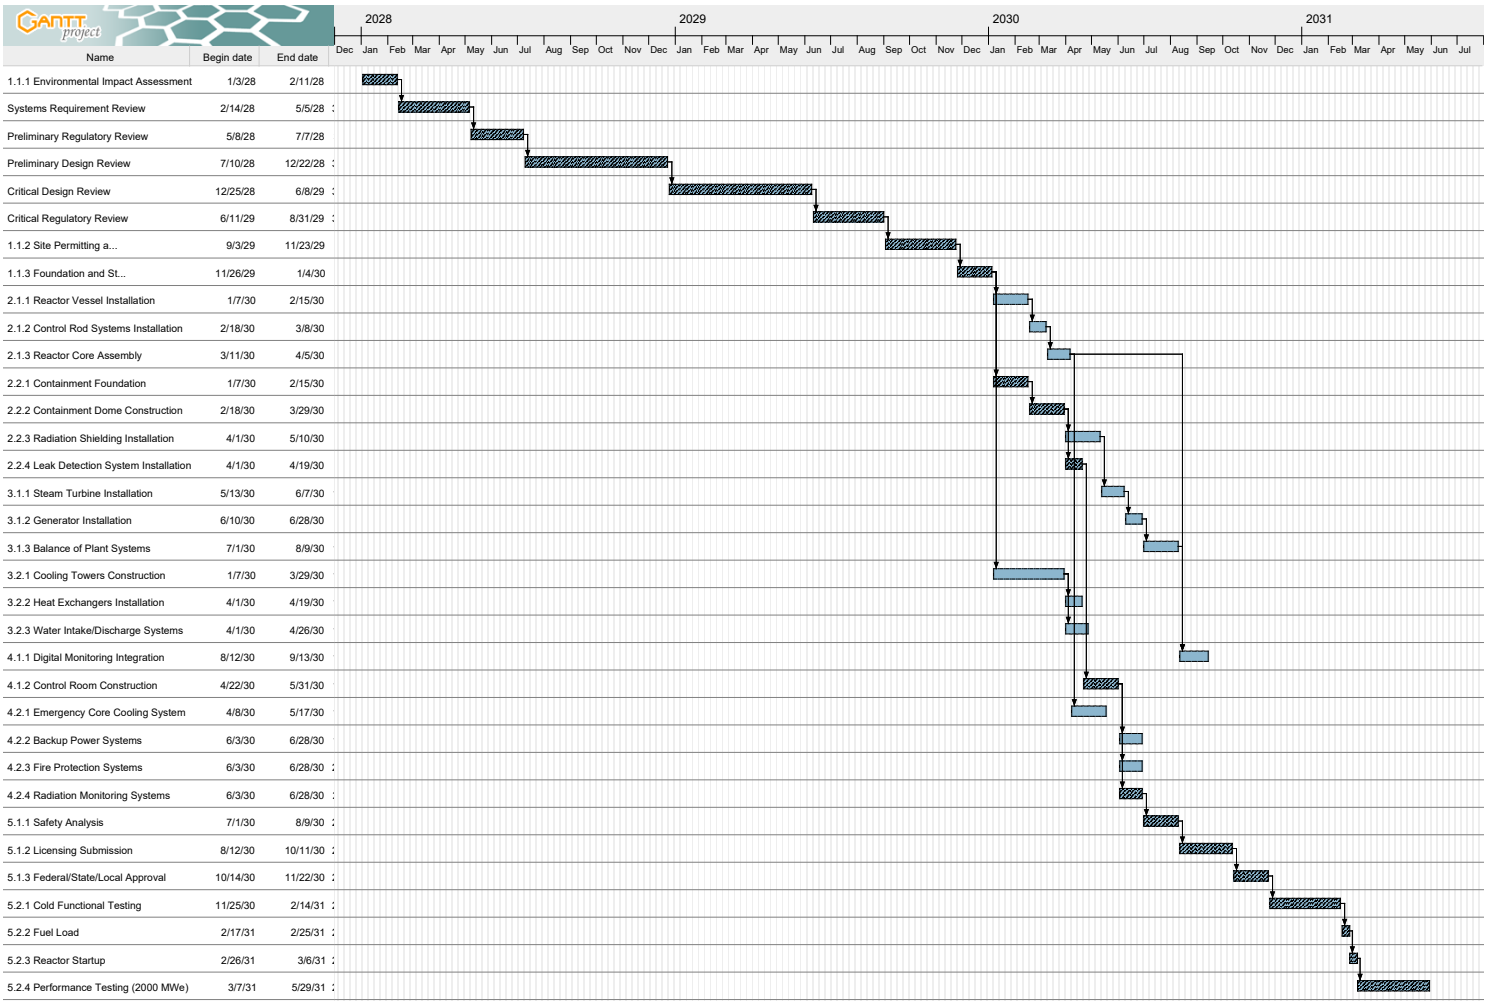

Name	Begin date	End date
1.1.1 Environmental Impact Assessment	1/3/28	2/11/28
Systems Requirement Review	2/14/28	5/5/28
Preliminary Regulatory Review	5/8/28	7/7/28
Preliminary Design Review	7/10/28	12/22/28
Critical Design Review	12/25/28	6/8/29
Critical Regulatory Review	6/11/29	8/31/29
1.1.2 Site Permitting a...	9/3/29	11/23/29
1.1.3 Foundation and St...	11/26/29	1/4/30
2.1.1 Reactor Vessel Installation	1/7/30	2/15/30
2.1.2 Control Rod Systems Installation	2/18/30	3/8/30
2.1.3 Reactor Core Assembly	3/11/30	4/5/30
2.2.1 Containment Foundation	1/7/30	2/15/30
2.2.2 Containment Dome Construction	2/18/30	3/29/30
2.2.3 Radiation Shielding Installation	4/1/30	5/10/30
2.2.4 Leak Detection System Installation	4/1/30	4/19/30
3.1.1 Steam Turbine Installation	5/13/30	6/7/30
3.1.2 Generator Installation	6/10/30	6/28/30
3.1.3 Balance of Plant Systems	7/1/30	8/9/30
3.2.1 Cooling Towers Construction	1/7/30	3/29/30
3.2.2 Heat Exchangers Installation	4/1/30	4/19/30
3.2.3 Water Intake/Discharge Systems	4/1/30	4/26/30
4.1.1 Digital Monitoring Integration	8/12/30	9/13/30
4.1.2 Control Room Construction	4/22/30	5/31/30
4.2.1 Emergency Core Cooling System	4/8/30	5/17/30
4.2.2 Backup Power Systems	6/3/30	6/28/30
4.2.3 Fire Protection Systems	6/3/30	6/28/30
4.2.4 Radiation Monitoring Systems	6/3/30	6/28/30
5.1.1 Safety Analysis	7/1/30	8/9/30
5.1.2 Licensing Submission	8/12/30	10/11/30
5.1.3 Federal/State/Local Approval	10/14/30	11/22/30
5.2.1 Cold Functional Testing	11/25/30	2/14/31
5.2.2 Fuel Load	2/17/31	2/25/31
5.2.3 Reactor Startup	2/26/31	3/6/31
5.2.4 Performance Testing (2000 MWe)	3/7/31	5/29/31

Resources Chart



Colorado Nuclear Power Plant Project Estimated Budget

WBS I.D.	ACTIVITY NAME	ACTIVITY DESCRIPTION	COST ESTIMATE	NOTES
1.1	Site Preparation		$ 657,500,000	Sum of 1.1.1-1.1.13
0.1	Environmental Impact Assessment	Analysis of radiation exposure to surrounding communities and	$ 225,000,000	UN Economic Council for Europe states that an EIA can cost between 0.5%-1% of total
0.2	Site Permitting and Land Acquisition	Securing relevant regulatory approval to build a nuclear plant	$ 22,500,000	2.5 sq miles required for 2000 MWe plant. Assume $5 mil/sq mi for land acquisition and
0.3	Foundation and Structural Concrete	Designing and pouring concrete foundation and structural	$ 410,000,000	From Plant Votgle - 700,000 cubic yards of concrete at 300/cubic yard + 200m
1.2	Plant Infrastructure	Surrounding facilities unrelated to plant direct operation	$ 200,000,000	Rough Estimate
1	**SUBTOTAL**		**$ 857,500,000**	Sum of 1.1 and 1.2
2.1	Reactor Installation	Design and installation of reactor core	$ 1,400,000,000	Estimated $700k per kW of output https://www.synapse
0.1	Reactor Vessel	This work package contains the design of the reactor vessel, a	$ -	Included in overall 2.1 cost
0.2	Control Rod Systems	This work package contains the design of the control rod	$ -	Included in overall 2.1 cost
0.3	Reactor Core Assembly	Constructing and assembling the reactor core and control rod	$ -	Included in overall 2.1 cost
2.2	Containment Structure	Design and construction of the reactor containment structure	$ 480,000,000	Sum of 2.2.1-2.2.4
0.1	Containment Foundation	Design and construction of the concrete foundation that forms	$ 320,000,000	Cost of Fukushima containment wall https://www.theguardian.com/environment/2
0.2	Containment Dome	Design and construction of the dome extending over reactor	$ 50,000,000	Rough Estimate
0.3	Radiation Shielding	Procurement and installation of the radiation-shielding material	$ 80,000,000	From Radiationshielding.com - Assuming 100 x 800k unit cost
0.4	Leak Detection System	Design, installation, and test of a system to detect radiation	$ 30,000,000	Rough Estimate
2	**SUBTOTAL**		**$ 1,880,000,000**	Sum of 4.1 and 4.2
3.1	Turbine Generator	Procurement and installation of the power-generating steam	$ 100,000,000	Includes Engineering Costs. Estimated 50,000/kW from Mitsubishi Heavy Industries
0.1	Steam Turbine Installation	Smaller sub-parts of the installation process	$ -	Included in total 3.1 cost estimate
0.2	Generator Installation	Smaller sub-parts of the installation process	$ -	Included in total 3.1 cost estimate
0.3	Balance of Plant Systems	Testing to ensure proper pairing of turbine and generator	$ -	Included in total 3.1 cost estimate
3.2	Cooling Systen	Design and construction of system to properly cool nuclear	$ 2,300,000,000	The Electric Power Research Institutes Estimates the total cost for a closed-cycle
0.1	Cooling Towers	Design and construction of the cooling tower. Section of reactor	$ -	Included in total 3.2 cost estimate
0.2	Heat Exchangers	Design and construction of the heat exchanger. Section of the	$ -	Included in total 3.2 cost estimate
0.3	Water Intake and Delivery	Design and construction of a pond to store cooling water and	$ -	Included in total 3.2 cost estimate
3	SUBTOTAL		**$ 2,400,000,000**	Sum of 3.1 and 3.2
4.1	Instrumentation and Control	Design and installation of all required instrumentation and	$ 400,000,000	Assuming $400/sqft for highly complex project
0.1	Digital Monitoring Integration	Integration of all monitoring systems with instrumentation in	$ -	Included in 4.1 total cost estimate
0.2	Control Room Construction	Design and construction of the physical control room	$ -	Included in 4.1 total cost estimate
4.2	Safety Systems	Design and installation of various autonomous safety systems	$ 555,000,000	Sum of 4.2.1-4.2.4
0.1	Emergency Core Cooling Systems	Design and installation of a system which automatically	$ 200,000,000	Rough Estimate
0.2	Backup Power Systems	Design and installation of a backup power system which	$ 30,000,000	~ 30 million https://www.mtu
0.3	Fire Protection Systems	Design and installation of fire suppression systems	$ 25,000,000	$25/sq ft for 1 mil ft^2 https://www.fireline.com/understanding-the
0.4	Radiation Monitoring Systems	Design and installation of systems which measure radation	$ 300,000,000	Repairing damages to Chernobyl's radiation monitoring equipment cost EUR100M
4	SUBTOTAL		**$ 955,000,000**	Sum of 4.1 and 4.2
5.1	Regulatory Approval	Preparing all necessary paperwork, applications, studies	$ 600,000,000	Total regulatory costs can be up to 5% of total budget
0.1	Safety Analysis	A comprehensive safety analysis of the nuclear plant, including	$ -	Included in 5.1 budget
0.2	Licensing Submission	Submitting all required paperwork and attending all	$ -	Included in 5.1 budget
0.3	Government Approval	Any work as part of the process for government approval	$ -	Included in 5.1 budget
5.2	Testing and Startup	All relevant testing to take plant from the completion of	$ 120,000,000	Based on similar plant commissioning Phases
0.1	Cold Functional Testing	Testing systems without nuclear fuel to verify basic operation	$ 200,000,000	Includes engineering supervision and risk monitoring
0.2	Fuel Testing	Validation and verification of procured fuel	$ 150,000,000	Includes regulatory safety checks.
0.3	Reactor Startup	All checklists and pre-operation requirements for initial power on	$ 100,000,000	Includes engineering supervision and risk monitoring
0.4	Performance Testing	Ensuring the plant operates at full efficiency and safety	$ 80,000,000	Industry-based estimate.
0.5	2000 Mwe Verification	Final validation of full power output	**$ 50,000,000**	Required before full operation.

5	SUBTOTAL		**$ 720,000,000**	Sum of 5.1 and 5.2
	GRAND TOTAL		**$ 6,812,500,000**	s
				Our budget is significantly lower than comparable projects. This can be caused by

RISK REGISTER

ID #1	Risk	Probability (1-5)	Impact (1-5)	Overall Risk Score (P x I)	Notes
1	Regulatory Delays and License Denials	4	5	20	The Nuclear Regulatory Commission Combined License process is among the most rigorous in any US industry. For a first of a kind plant in the state with no nuclear precedent, this process is expected to take 7-190 years and involve multiple rounds of public comment, environmental impact assessments and safety reviews.
2	Construction Cost Overrun and Budget Collapse	4	4	16	Nuclear construction is one of the most capital intensive and overturn prone categories of infrastructure. The project's $27B baseline budget carries significant vulnerability to escalation across all cost categories, especially do to the changing political and economic climate.
3	Skilled Labor Shortage	3	4	12	The nuclear industry requires a highly skilled and specialized workforce that cannot be quickly trained or substituted. Nuclear-qualified welders, instrumentation and control technicians, health physics staff, reactor engineers and NCR licensed operators are in short supply nationally. Also, Colorado has zero existing nuclear power infrastructure from which to draw talent.
4	Uranium Fuel Supply Chain Distribution	3	5	15	Nuclear fuel supply is a multi-step process spanning uranium mining, conversion, enrichment, and fuel fabrication. Each stage controlled by a small number of global suppliers. The US depends heavily on foreign enrichment capabilities and recent geopolitical shifts have exposed vulnerabilities in this supply chain.
5	Natural Disaster	2	5	10	Colorado's geology and climate present multiple natural disaster pathways that could severely damage the project during its most vulnerable phase. Risks include seismic, wildfire, flood and water.

RISK MANAGEMENT TABLE

ID #	Risk	Overall Risk Score	Response (M-A-T-A)	Response Description	Trigger & Owner	Adjusted Risk Score	Notes
1	Regulatory Delays and License Denials	20	Mitigate	Lauch NRC pre-application consultation by Q3 2026. Have regulatory counsel with COL experience. Regulatory team from project initiation. Establish community liaison program to engage communities and tribal nations.	Any NRC pre-application feedback identifying unresolved safety/ environmental issues, or formal public objection before 6/30/2029 Owner: Chief Regulatory Officer and Project Sponsor.	10	Even with aggressive mitigation, regulatory risk cannot be eliminated. Probability is reduced form a 4 to a 2 via early engagement and a seasoned regulatory team, but impact stays at a 5.
2	Construction Cost Overrun and Budget Collapse	16	Mitigate	Establish 20% of $27B baseline before CDR 6/30/2031. Execute fixed-price contracts for nuclear steam supply system and equipment by 2028. Implement monthly EVM reporting. Require performance bonds form all external contractors	Any cost category exceeds baseline by 10% or total cost at completion forecast exceeds $29.7 B. Owner: Project Controls Director.	9	Fixed-price contracting and contingency reserves reduce both probability and impact moving both down to a score of 3.
3	Skilled Labor Shortage	12	Mitigate	Partner with Colorado School of Mines and Cu Boulder for nuclear engineering pipelines starting in 2026. Negotiate multi-year Project Labor Agreements with craft unions before 2030. Establish on-site worker housing for external construction staff.	Any construction discipline falls below 85% planned staffing for two consecutive weeks, or union files formal labor dispute notice. Owner: Construction Manager and HR director	6	Early workforce investment and union agreements significantly reduce both probability and impact. New probability being a 2 and impact 3.

4	Uranium Fuel Supply Chain Distribution	**15**	**Transfer**	**Execute 10-15 year fuel supply agreements with more than 3 diversified suppliers before 2032. Include take or pay and force majeure penalty clause. Purchase political risk and supply disruption insurance covering $900M first fuel load. Engage DOE uranium reserve program as backup supplier.**	**Primary Supplier issues force majeure notice, uranium spot price exceeds 150% of contract price for 90+days or US sanctions imposed on a contracted supplier. Owner: Supply Chain Director**	**6**	**Contractual transfer and supplier diversification reduce both dimensions. The probability goes down to a 2 and impact a 3.**
5	Natural Disaster	10	Transfer	Procure all-risk construction insurance with natural catastrophe endorsement covering full replacement value at peak construction. Include Delay in start up coverage. Establish wildfire defensible perimeters.	A natural disaster (earthquake, flood, fire). Owner: Site safety officer and notify insurance carriers	4	Insurance transfer and careful site selection meaningfully reduce residual risk. Probability hold at 2 and Impact reduces to 2

Project Status Report – Colorado Nuclear Plant | Active Construction

Status Date: Jun 2030 (mid-construction)


Overall Completion: 60% (Earned Value Basis)

Schedule Status: On Track (SPI= 1; SV=$0)


Budget Status: Over (10% over; CPI = 0.91)

EST. at Completion: $29.7 B ($27.0B baseline + $2.7B)

Construction Progress – Jan 2028 thru Jun 2031 (planned completion)

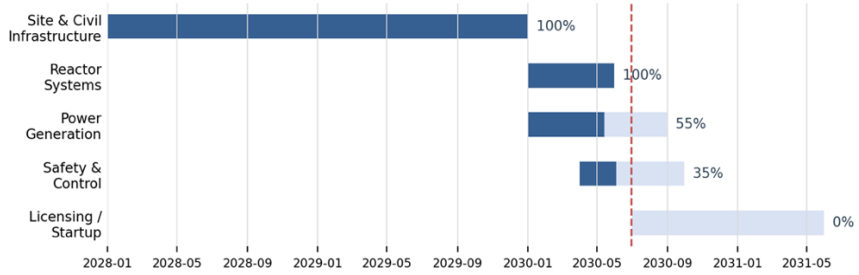

Budget Overview

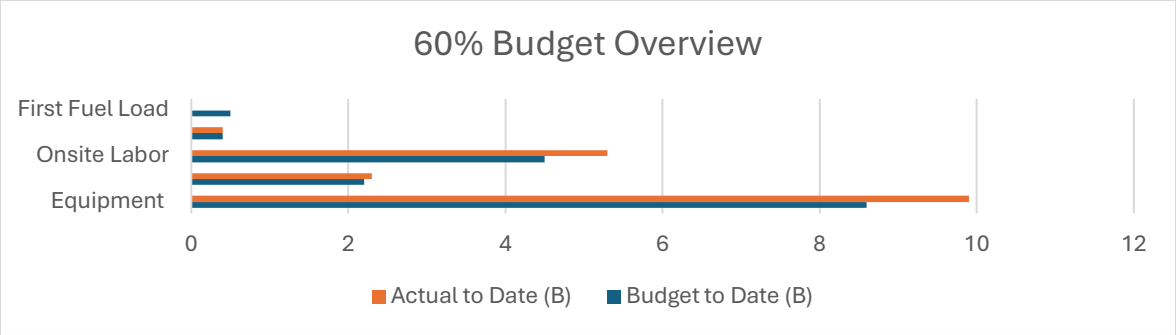

Category	Budget	Actual/Committed	Variance
Equipment	$14.4B	$15.84B	-$1.44B
Construction Materials	$3.6B	$3.9B	-$0.3B
Onsite Labor	$7.5B	$8.32B	-$0.82B
Other Services	$0.6B	$0.63B	-$0.03B
First Fuel Load	$0.9B	Not Started	Not Started
Total	$27B	$28.69B	-$1.62B

Milestone Status

Compete:

- Site Feasibility Study | Jan 2028
- Systems Requirement Review | Jun 2028
- Prelim. Regulatory Review | Jun 2029

- Critical Design Review | Jun 2031
- Critical Regulatory Review | Jun 2031
- Emergency Action Plan Approved | Jan 2030
- Construction Start | Jan 2032
- Site and Civil Infrastructure | Jun 2030
- Reactor Systems | Jun 2030


In progress:

- Power Generation System | 55%
- Safety and Control Systems | 35%

Upcoming:

- Construction End
- Acceptance Tests
- Full Operation

Earned Value Analysis

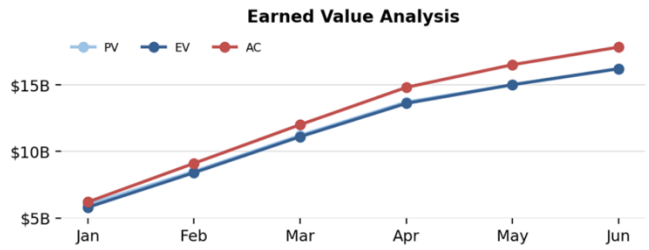

Key Earned Value Metrics (Jun 2030)

Metric	Formula	Value
Budget at Completion	Total approve budget	$27B
Planned Value	BAC *% scheduled	$16.2B
Earned Value	BAC * % completion	$16.2B
Actual cost	Costs incurred	$17.82B
Schedule Variance	EV - PV	$0
Cost Variance	EV - AC	-$1.62B
Sched. Pref. Index	EV/PV	1.00
Cost Pref. Index	EV/AC	0.91
Est. at Completion	BAC/ CPI	-$29.67B
Variance at Completion	BAC - EAC	-$2.67B

Executive Summary and Decisions Needed

Status: Project is 60% complete as of June 2030 and fully on schedule. Site and Civil Infrastructure and Reactor Systems are complete. Power Generation is 55% done; Safety and Control is 35% done. Construction is tracking to the Jan 2038 completion milestone. **Concerns:** Costs are running 10% over budget, primary drivers: equipment procurement over by $1.44 B; labor over by $0.82B. If CPI holds at 0.91, final cost will be about $29.7B - a $2.67B overrun. **Action Required:** Decision needed: (A) Authorize draw-down from the $5.4B contingency reserve to cover projected overrun, OR (B) Direct PM to implement scope freeze and renegotiate labor packages before Power Generation phase closes (Dec 2030). Delaying this decision risks exhausting contingency before Safety & Control completion.

1. Project Closure Task List

Edit the Wrap-Up Checklist below for your project, eliminating items that do not apply and adding any that may be missing. Use **BLUE FONT** and ~~**STRIKE THROUGH**~~ to show your changes.

	Task
	Team
1	Schedule for reducing project staff been developed and accepted?
2	Identify staff who can transition to sustaining projects such as maintenance or operations.
3	Staff released or notified of new assignments?
4	Performance reviews for team members conducted?
5	Staff offered outplacement services and career counseling activities?
6	Transition staff to sustaining projects.
	Vendors/contractors
5	Performance reviews for all vendors conducted?
6	Project accounts finalized and all billing closed?
	Customer/Users
~~7~~	~~Customer signed-off on the delivered product?~~
7	All acceptance tests passed.
~~8~~	~~Project review and evaluation interview with the customer conducted?~~
8	Power plant connected to grid and fully placed on line.
9	Users interviewed on satisfaction with deliverables, team, vendors, etc
	Equipment and facilities
10	Working group assessing project successes and failures and possible application to other sites.
10	Have project resources been transferred to other projects?
11	Have rental or lease equipment agreements been closed out?
12	Has the date for the closure review been set and stakeholders notified?
	Attach comments or links on any tasks you feel need explanation.